




# Moccasin Wallow Road Improvements from U.S. 41 to U.S. 301 Bi-Weekly Update | December 9, 2024

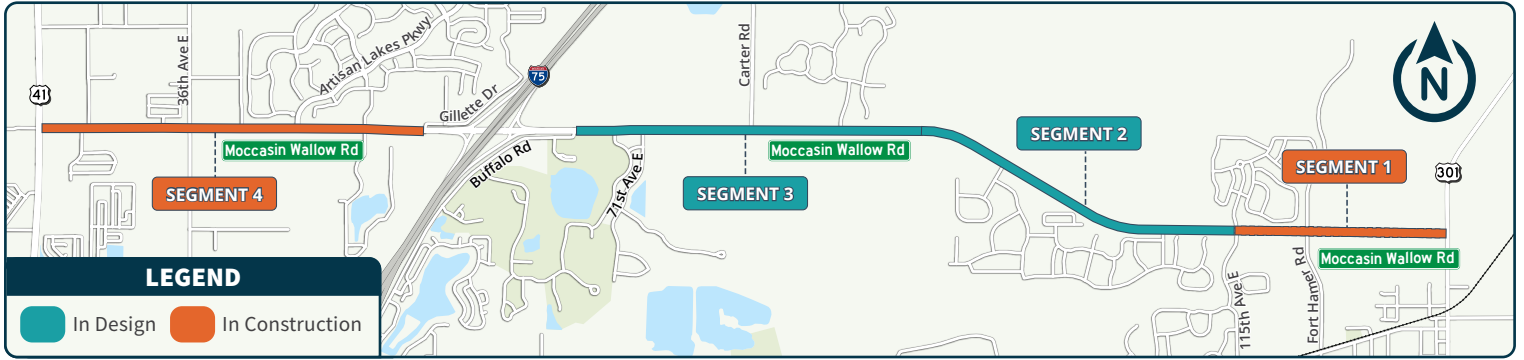

## SEGMENT 1 (U.S. Highway 301 to 115th Avenue East):

**ANTICIPATED COST AND CONSTRUCTION SCHEDULE**

- Construction Cost:** \$28 Million
- Construction Start:** January 2023
- Completion Date:** Fall 2024

This roadway project will widen approximately one mile of Moccasin Wallow Road from two lanes to four lanes (two in each direction) between U.S. 301 and 115th Avenue East. This roadway segment will also include a 12-foot-wide multi-use path on the north side of Moccasin Wallow Road, a 6-foot-wide sidewalk on the south side, and 7-foot-wide bicycle lanes in each direction.

Median openings will be provided for access to residential communities and the addition of pedestrian-activated crossings, street lighting, signalized intersections, driveway modifications, and dedicated turn lanes will improve safety and traffic operations throughout the roadway corridor.

This segment also includes construction of a roundabout at the U.S. 301 and Moccasin Wallow Road intersection for more efficient traffic flow and improved safety. Roadway drainage will be improved and stormwater run off will be directed to new linear ponds along Moccasin Wallow Road and county right-of-way near the U.S. 301 roundabout.

### Current Activities:

The contractor is working to apply road markings, as well as perform sidewalk repairs, the installation of signage, and final cleanup as this segment nears completion. Travelers are reminded to exercise caution and observe the new traffic patterns and construction vehicles operating within the project area.

## SEGMENT 2 (115th Avenue East to Bay Winds Parkway):

**ANTICIPATED COST AND CONSTRUCTION SCHEDULE**

- Construction Cost:** \$35 Million
- Construction Start:** December 2024
- Completion Date:** Mid 2026

This roadway project will widen approximately 1.6 miles of Moccasin Wallow Road from two lanes to four lanes (two in each direction) between 115th Avenue East and Bay Winds Parkway. This roadway segment will also include a 12-foot-wide multi-use path on the north side of Moccasin Wallow Road, a 6-foot-wide sidewalk on the south side, and 7-foot-wide bicycle lanes in each direction.

Median openings will be provided for access to residential communities and the addition of pedestrian-activated crossings, street lighting, signalized intersections, driveway modifications, and dedicated turn lanes will improve safety and traffic operations. Roadway drainage will be improved and stormwater run-off will be directed to new linear ponds along Moccasin Wallow Road.






### Current Activities:

Clearing activities within the right of way are ongoing, along with the installation of silt fencing and mobilization of construction materials and equipment as the contractor prepares to begin construction.

### SEGMENT 3 (Bayside Community Church to Buffalo Road (east of I-75)):

#### ANTICIPATED COST AND CONSTRUCTION SCHEDULE

-  **Construction Cost:** \$43 Million
-  **Construction Start:** Spring 2025
-  **Completion Date:** Early 2027

This roadway project will widen approximately 1.8 miles of Moccasin Wallow Road from two lanes to four lanes (two in each direction) between Bayside Community Church and Buffalo Road. This roadway segment will also include a 12-foot-wide multi-use path on the north side of Moccasin Wallow Road, a 6-foot-wide sidewalk on the south side, and 7-foot-wide bicycle lanes in each direction.




Median openings will be provided for access to residential communities and the addition of pedestrian activated crossings, street lighting, signalized intersections, driveway modifications, and dedicated turn lanes will improve safety and traffic operations. Roadway drainage will be improved and stormwater run-off will be directed to new linear ponds along Moccasin Wallow Road.

### Current Activities:

This project is currently in design. Land acquisition and environmental permitting are ongoing.

### SEGMENT 4 (U.S. 41 to Gillette Drive):

#### ANTICIPATED COST AND CONSTRUCTION SCHEDULE

-  **Construction Cost:** \$49 Million
-  **Construction Start:** January 2023
-  **Completion Date:** Fall 2024

This roadway project will widen approximately 1.9 miles of Moccasin Wallow Road from two lanes to four lanes (two in each direction) between Gillette Drive (located just west of I-75) and U.S. 41. This roadway segment will also include a 12-foot-wide multi-use path on the north side of Moccasin Wallow Road, a 6-foot-wide sidewalk on the south side, and 7-foot-wide bicycle lanes in each direction.

Median openings will be provided for access to residential communities and the addition of pedestrian activated crossings, street lighting, signalized intersections, driveway modifications, and dedicated turn lanes will improve safety and traffic operations. Roadway drainage will be improved and stormwater run-off will be directed to new linear ponds along Moccasin Wallow Road.



# Moccasin Wallow Road Improvements from U.S. 41 to U.S. 301

Bi-Weekly Update | December 9, 2024




## Current Activities:


The contractor has completed work at Artisan Lakes Parkway, Bud Rhoden Road, 40th Avenue E. and Gateway Boulevard, and the streets are now open to traffic. Streetlights have been installed and activated along the project corridor, with traffic signal work remaining. Sodding, paving, striping, and other restoration activities are ongoing.


On **Monday, December 9**, the contractor will implement a traffic switch on Moccasin Wallow Road within the project area. As part of the switch, the westbound lanes will be opened to traffic and lane closures/traffic shifts will begin in the eastbound lanes. Flaggers will be in place to direct travelers. Paving operations will follow on **Monday, December 16**, weather permitting.

Travelers are reminded to exercise caution and observe the new traffic patterns, construction vehicles, and crews when traveling within the project area.

## CONTACT US

 **Tina Allen**  
Community Outreach Specialist

 [info@MoccasinWallowRoad.com](mailto:info@MoccasinWallowRoad.com)

 (941) 213-1141

  
**Project Website:**  
[www.moccasinwallowroad.com](http://www.moccasinwallowroad.com)



For more information, scan the QR code to visit the project website.