




Moccasin Wallow Road Improvements from U.S. 41 to U.S. 301

Project Update | July 31, 2026

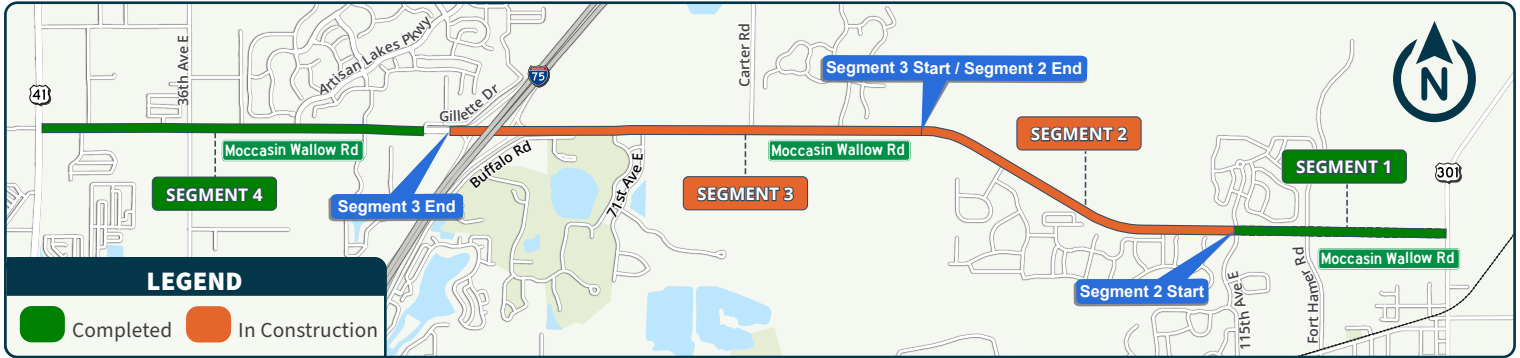

SEGMENT 2 (115th Avenue East to Bay Winds Parkway):

Current Activities:

Storm drain and utility pipe installations are nearing completion throughout the project area. Construction of the future westbound lanes is underway in preparation for upcoming paving operations. Crews continue to advance work on curb and gutter installation, embankment improvements, street lighting, and sidewalk construction.

Two utility crossings remain under construction; however, all remaining underground utility work throughout the corridor has been completed. Relocations of third-party private utilities are also complete.

Traffic continues to operate under the current traffic shift on **Moccasin Wallow Road between Bay Winds Parkway and Grand River Parkway**, with both eastbound and westbound traffic utilizing the newly constructed eastbound lanes. This traffic pattern will remain in place while construction continues on the north side of the roadway. Once complete, westbound traffic will be shifted to the newly constructed north-side lanes. Final project completion remains anticipated for **late 2026**.

Motorists are reminded to follow the reduced speed limit throughout the construction zone and use caution while traveling through the area. Construction activities are scheduled **Monday through Friday from 7 a.m. to 5 p.m., weather permitting**

ANTICIPATED COST AND CONSTRUCTION SCHEDULE

- Construction Cost:** \$35 Million
- Construction Start:** December 2024
- Completion Date:** Late 2026

This roadway project widens approximately 1.8 miles of Moccasin Wallow Road from two lanes to four lanes (two in each direction) between 115th Avenue East to just east of Bay Winds Parkway and includes a 12-footwide multi-use path on the north side of Moccasin Wallow Road, a 6-foot-wide sidewalk on the south side, and 8-foot-wide bicycle lanes in each direction. Median openings are also being provided for access to most residential communities and the addition of pedestrian-activated crossings, street lighting, and a signalized intersection at Sawgrass Road will improve safety and traffic operations.

CONTACT US

- Community Outreach Specialist
- info@MoccasinWallowRoad.com
- (941) 213-1141



Project Website:
www.moccasinwallowroad.com




For more
information,
scan the
QR code to visit
the project
website.



Moccasin Wallow Road Improvements from U.S. 41 to U.S. 301

Project Update | July 31, 2026

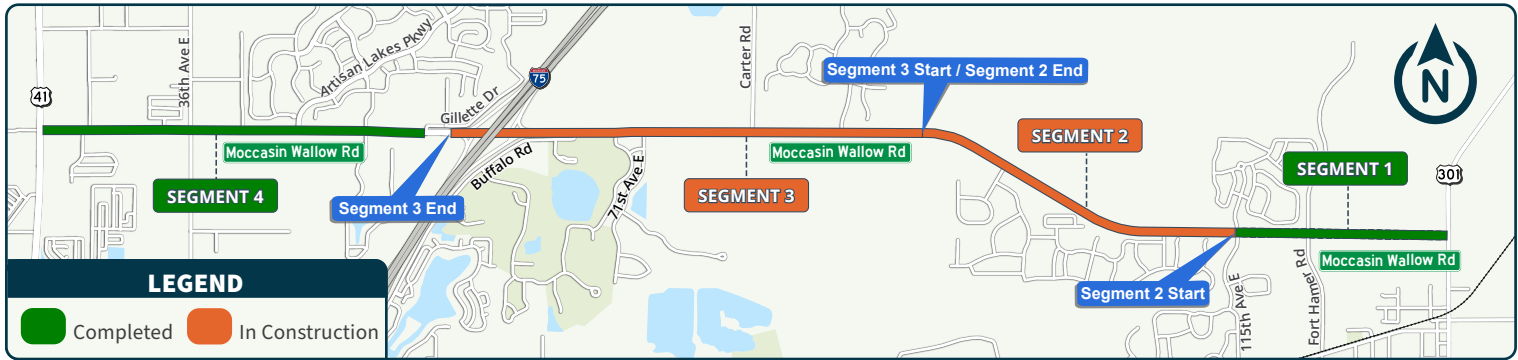

SEGMENT 3 (Bay Winds Parkway to Buffalo Road/Wellness Drive):

Current Activities:

Installation of the watermain and reclaimed water line is complete, and preliminary leak testing of both systems is underway. Please be aware that a future watermain connection, similar to **Segment 2**, will be required and may involve a temporary water shutdown for nearby communities. **Residents will be notified in advance of any planned service interruptions.**

Force main and storm drainage installation continue throughout the project area, along with curb and gutter installation and roadway embankment improvements. While several utility crossings are still being finalized, most of the underground utility work throughout the corridor has been completed. Traffic signal and street lighting infrastructure work continues throughout the segment.

Third-party utility relocation efforts by Florida Power & Light (FPL) and Peace River Electric Cooperative (PRECO) are nearing completion. Removal of existing utility poles is expected to continue over the coming weeks. Most other third-party utility relocations are complete, with a few remaining relocations still underway.

Motorists are reminded to observe the reduced speed limit within the construction zone and remain alert of workers and equipment. Construction activities are scheduled **Monday through Friday from 7 a.m. to 5 p.m., weather permitting.**

ANTICIPATED COST AND CONSTRUCTION SCHEDULE

- Construction Cost:** \$43 Million
- Construction Start:** September 2025
- Completion Date:** Mid 2027

This roadway project widens approximately 1.9 miles of Moccasin Wallow Road from two lanes to four lanes (two in each direction) between Gillette Drive (located just west of I-75) and U.S. 41. This roadway segment also includes a 12-foot-wide multi-use path on the north side of Moccasin Wallow Road, a 6-foot-wide sidewalk on the south side, and 7-foot-wide bicycle lanes in each direction. Median openings are provided for access to residential communities and the addition of pedestrian activated crossings, street lighting, signalized

intersections, driveway modifications, and dedicated turn lanes improve safety and traffic operations. Roadway drainage is improved with stormwater run-off directed to new linear ponds along Moccasin Wallow Road.

CONTACT US

- Community Outreach Specialist
- info@MoccasinWallowRoad.com
- (941) 213-1141



Project Website:
www.moccasinwallowroad.com



For more
information,
scan the
QR code to visit
the project
website.