




Moccasin Wallow Road Improvements from U.S. 41 to U.S. 301

Project Update | August 17, 2026

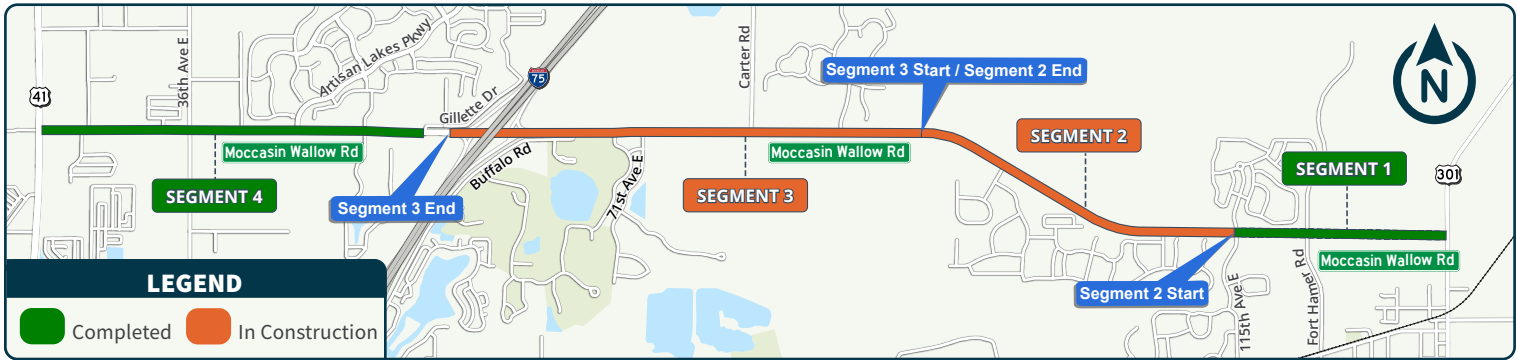

SEGMENT 2 (115th Avenue East to Bay Winds Parkway):

Current Activities:

Storm drain and utility pipe installations are nearing completion throughout the project area. Construction of the future westbound lanes is moving along as crews prepare for upcoming paving operations. Work also continues on curb and gutter installation, embankment improvements, street lighting, and sidewalk construction.

Two utility crossings remain under construction; however, all other underground utility work throughout the corridor has been completed.

The current traffic shift remains on **Moccasin Wallow Road between Bay Winds Parkway and Grand River Parkway**, with both eastbound and westbound traffic traveling on the newly constructed eastbound lanes. This traffic pattern will remain in place as crews continue construction along the north side of the roadway. Once that work is complete, westbound traffic will shift to the newly constructed north-side lanes. Final project completion remains anticipated for **late 2026**.

Motorists are reminded to follow the reduced speed limit and use caution when traveling through the construction zone. Construction activities are scheduled **Monday through Friday, from 7 a.m. to 5 p.m.**, weather permitting.

ANTICIPATED COST AND CONSTRUCTION SCHEDULE

- Construction Cost:** \$35 Million
- Construction Start:** December 2024
- Completion Date:** September 2026

This roadway project widens approximately 1.8 miles of Moccasin Wallow Road from two lanes to four lanes (two in each direction) between 115th Avenue East to just east of Bay Winds Parkway and includes a 12-footwide multi-use path on the north side of Moccasin Wallow Road, a 6-foot-wide sidewalk on the south side, and 8-foot-wide bicycle lanes in each direction. Median openings are also being provided for access to most residential communities and the addition

of pedestrian-activated crossings, street lighting, and a signalized intersection at Sawgrass Road will improve safety and traffic operations.

CONTACT US

- Community Outreach Specialist
- info@MoccasinWallowRoad.com
- (941) 213-1141



Project Website:
www.moccasinwallowroad.com




For more information, scan the
QR code to visit the project website.



Moccasin Wallow Road Improvements from U.S. 41 to U.S. 301

Project Update | August 17, 2026

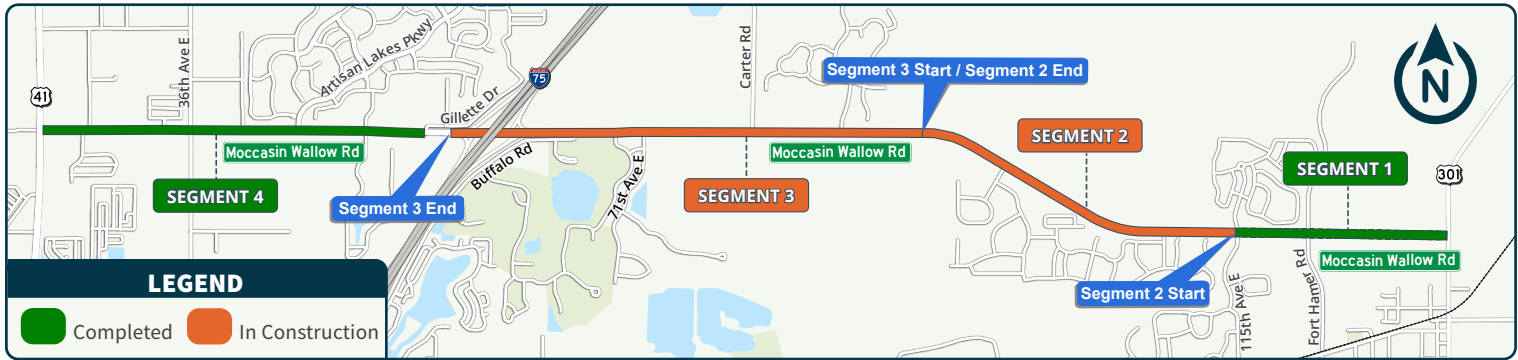

SEGMENT 3 (Bay Winds Parkway to Buffalo Road/Wellness Drive):

Current Activities:

Installation of the watermain and reclaimed water line is complete, and preliminary leak testing of both systems is underway. A future watermain connection, similar to **Segment 2**, will be required and may result in a temporary water shutdown for nearby communities. **Residents will be notified in advance of any planned service interruptions.**

Force main and storm drainage installation continues throughout the project area, along with curb and gutter construction and roadway embankment improvements. While several utility crossings are still being finalized, the majority of underground utility work throughout the corridor is complete.

Work on traffic signal and street lighting infrastructure also continues throughout the segment. Third-party utility relocations by Florida Power & Light (FPL) and Peace River Electric Cooperative (PRECO) are nearing completion.

Motorists are reminded to observe the reduced speed limit within the construction zone and remain alert of workers and equipment. Construction activities are scheduled **Monday through Friday from 7 a.m. to 5 p.m.**, weather permitting.

ANTICIPATED COST AND CONSTRUCTION SCHEDULE

- Construction Cost:** \$43 Million
- Construction Start:** September 2025
- Completion Date:** Mid 2027

This roadway project widens approximately 1.9 miles of Moccasin Wallow Road from two lanes to four lanes (two in each direction) between Gillette Drive (located just west of I-75) and U.S. 41. This roadway segment also includes a 12-foot-wide multi-use path on the north side of Moccasin Wallow Road, a 6-foot-wide sidewalk on the south side, and 7-foot-wide bicycle lanes in each direction. Median openings are provided for access to residential communities and the addition

of pedestrian activated crossings, street lighting, signalized intersections, driveway modifications, and dedicated turn lanes improve safety and traffic operations. Roadway drainage is improved with stormwater run-off directed to new linear ponds along Moccasin Wallow Road.

CONTACT US

- Community Outreach Specialist
- info@MoccasinWallowRoad.com
- (941) 213-1141



Project Website:
www.moccasinwallowroad.com



For more information, scan the
QR code to visit the project website.